



INDOOR **TECHNICAL** LIGHTING

I N D O O R L U M I N A I R E R A N G E

CATALOGUE

JULY 2026



T H A T I N S P I R E S



DIVINE

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	120X50mm	155X55mm	175X55mm
Cut Out	:	110mm	145mm	165mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		

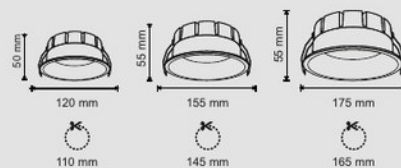

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

DIVINE

DOWNLIGHT

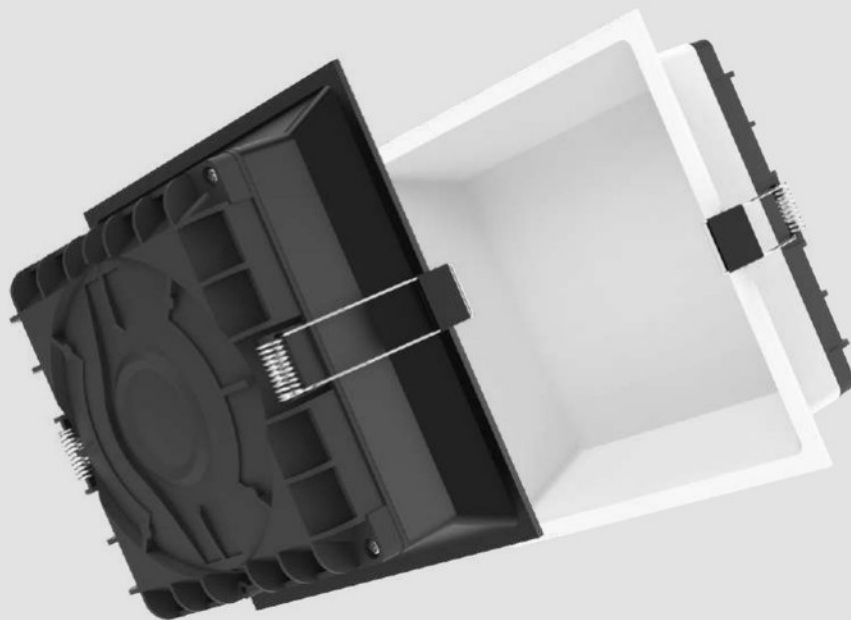

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w
Dimension	:	110x110x50mm	145x145x55mm
Cut Out	:	100X100mm	135X135mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	110°	
CRI (Ra)	:	80 (90 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



GRACE

DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	90X56mm	100X56mm	125X56mm
Cut Out	:	85mm	95mm	115mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	100°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		

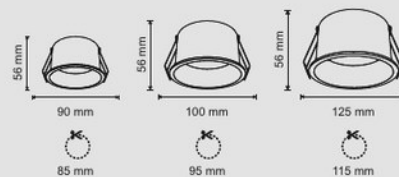

50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

FISCO

ADJUSTABLE DOWNLIGHT




Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

Watt	:	12w
Dimension	:	110X45mm(55mm After Moving)
Cut Out	:	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	110°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

ACCORD

SLIM DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	12w	18w	24w
Dimension	:	115X30mm	155X30mm	180X30mm
Cut Out	:	105mm	145mm	170mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

IGNITE

SURFACE DOWNLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	8w	15w	22w
Dimension	:	90X75mm	110X75mm	125X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	110°		
CRI (Ra)	:	80 (90 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

SPIRIT

ANTI GLARE SPOTLIGHT




Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

NEW
ARRIVAL

Watt	:	7-9w	12-15w
Dimension	:	62X70mm	75X75mm
Cut Out	:	55mm	65mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36/55°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 35KV
Surge



440V
OVP





5
Year
Warranty*



Anti Glare

COMFORT

SPOTLIGHT

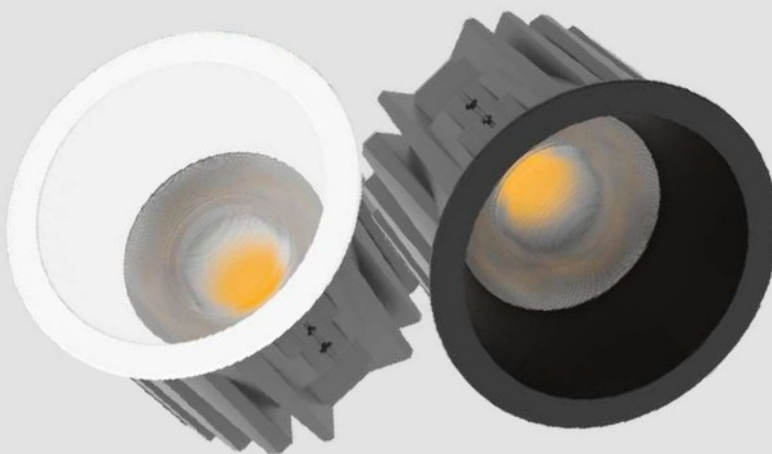

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	15w	20w
Dimension	:	85X66mm	105X70mm
Cut Out	:	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	50°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

JAZZ

ANTIGLARE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7w	12w
Dimension	:	65X80mm	85X88mm
Cut Out	:	55mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36/60°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*



Anti Glare

SPOTLIGHT



STUNNER STRIPES

SPOTLIGHT




Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

NEW
ARRIVAL

Watt	:	7-9w	12-15w	20-25w
Dimension	:	57X75mm	72X85mm	82X95mm
Cut Out	:	50mm	65mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/60°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		

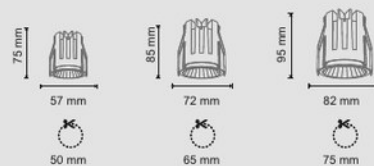

50,000
Hours



High
Lumens



Flicker Free



Upto 35KV
Surge




440V
OVP



5
Year
Warranty*

STUNNER_{PRISM}

SPOTLIGHT

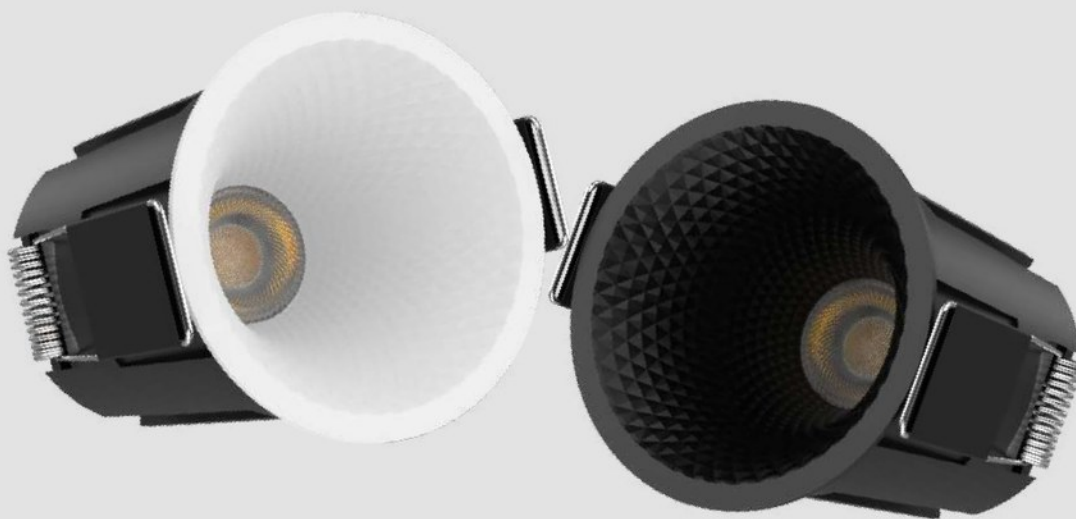

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee


BK

WH

Body Color Available

NEW
ARRIVAL

Watt	:	7-9w	12-15w	20-25w
Dimension	:	57X75mm	72X85mm	82X95mm
Cut Out	:	50mm	65mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	24/36/60°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*

CRUISE

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH


Body Color Available

Watt	:	7-9w	12-15w	20-25w	30-36w
Dimension	:	70X65mm	85X75mm	95X90mm	115X105mm
Cut Out	:	60mm	75mm	85mm	105mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)			
Material	:	Die Cast Aluminium ADC-12			
LED Brand	:	Bridgelux			



DUKE

SPOTLIGHT

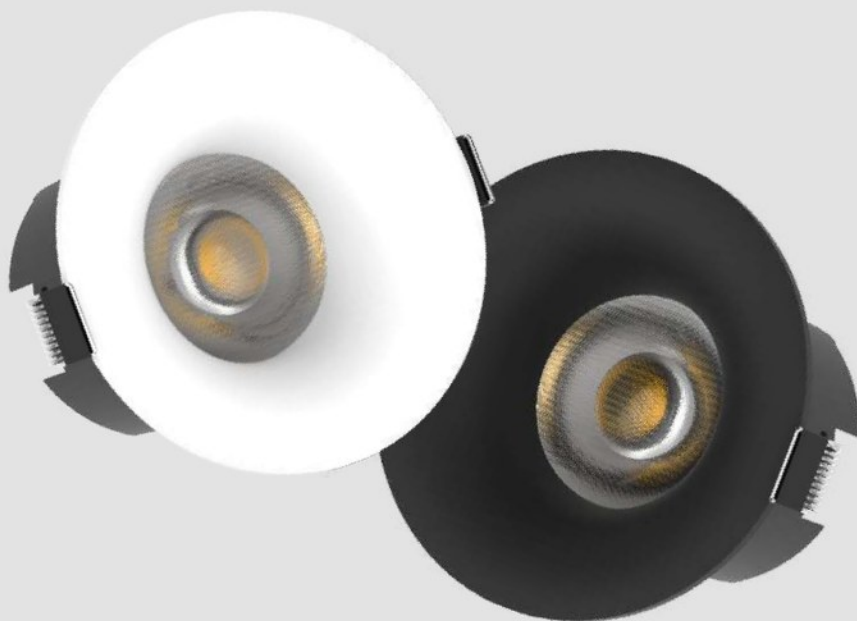

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	70X58mm	85X65mm	98X84mm
Cut Out	:	60mm	75mm	85mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP




5
Year
Warranty*

EXOTIC

ANTI GLARE SPOTLIGHT



Available In : Gun Metal, Chrome, Rose Gold, Gold, Titanium Black

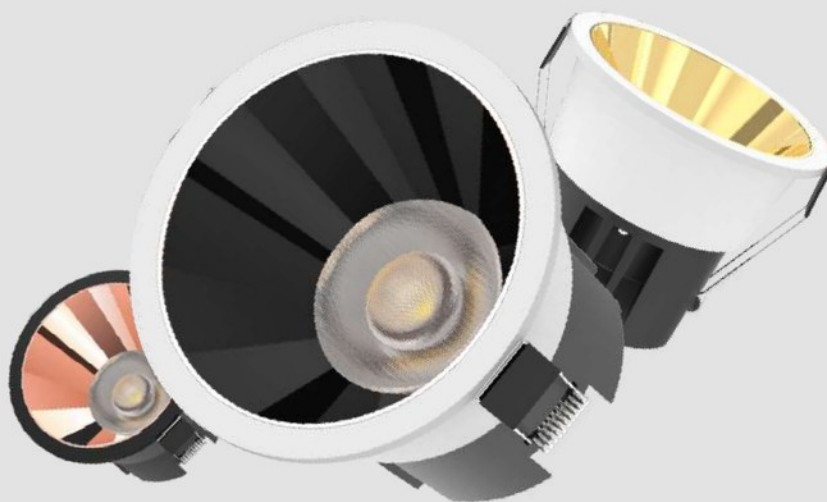

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	75X70mm	85X80mm	100X95mm
Cut Out	:	65mm	75mm	90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		

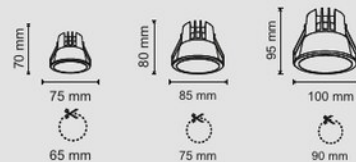

CURVE

ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w	30-36w
Dimension	:	78X65mm	88X75mm	100X85mm	120X100mm
Cut Out	:	72mm	80mm	93mm	113mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)			
Material	:	Die Cast Aluminium ADC-12			
LED Brand	:	Bridgelux			



65 mm

78 mm



75 mm

88 mm





85 mm

100 mm



100 mm

120 mm



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

BLAST

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH


Body Color Available

Watt	:	7-9w	12-15w	20-25w	30-36w
Dimension	:	60X48mm	70X50mm	80X65mm	105X77mm
Cut Out	:	52mm	60mm	70mm	90mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)			
		Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)			
Material	:	Die Cast Aluminium ADC-12			
LED Brand	:	Bridgelux			

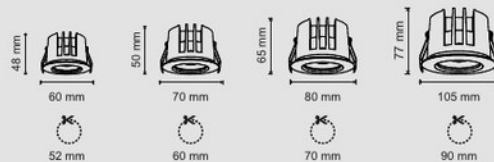

HECTOR

SPOTLIGHT

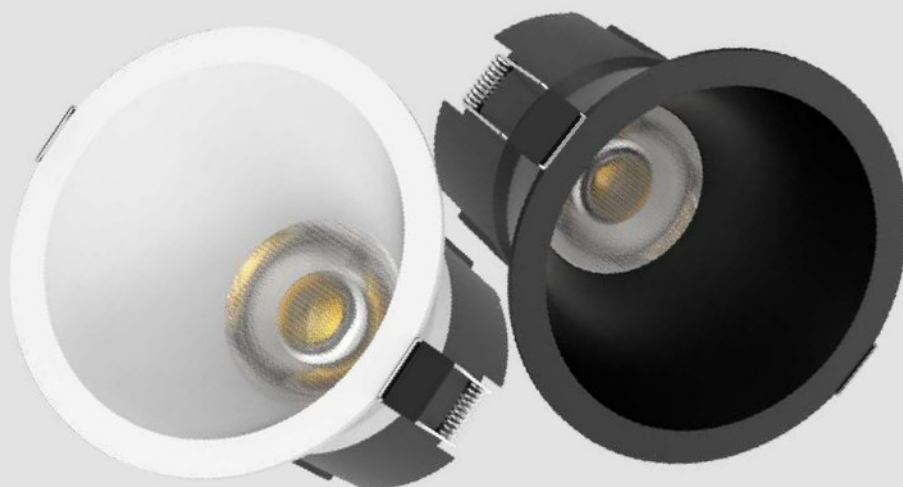

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w
Dimension	:	72X75mm	90X95mm
Cut Out	:	62mm	80mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

COMPASS

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w	20-25w
Dimension	:	60X80mm	70X95mm	85X118mm
Cut Out	:	53mm	62mm	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

TRUMP

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12-15w	2X12-15w
Dimension	:	83X83X83mm	162X83X83mm
Cut Out	:	77X77mm	155X77mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
Note : 2700/3500/5000k (available on request)			
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP

5

Year
Warranty*

PASSION

SPOTLIGHT

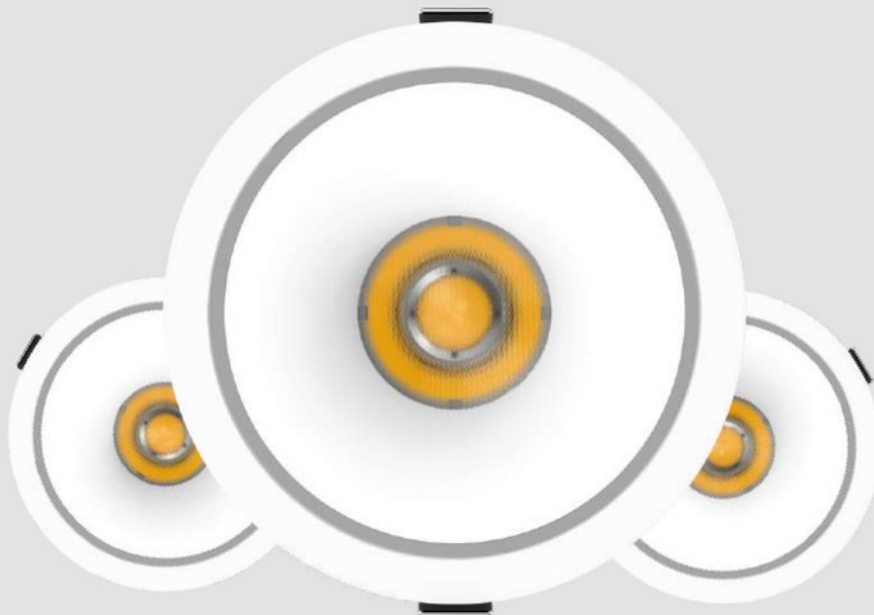

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7-9w	12-15w
Dimension	:	80X54mm	110X70mm
Cut Out	:	70mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

ARC

SPOTLIGHT




Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

Watt	:	12-15w
Dimension	:	72X75mm
Cut Out	:	65mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

TWIST

TRIMLESS SPOTLIGHT

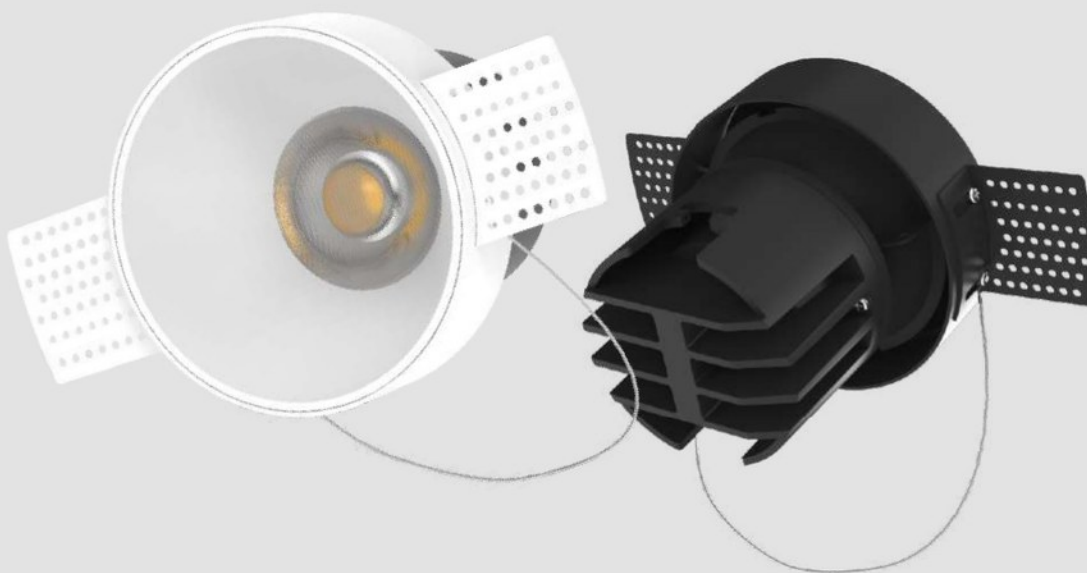


Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

Watt	:	12-15w
Dimension	:	82X80mm
Cut Out	:	82mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

HARRIER

SPOTLIGHT




Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

Watt	:	12-15w
Dimension	:	85X85mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

EYE

SPOTLIGHT

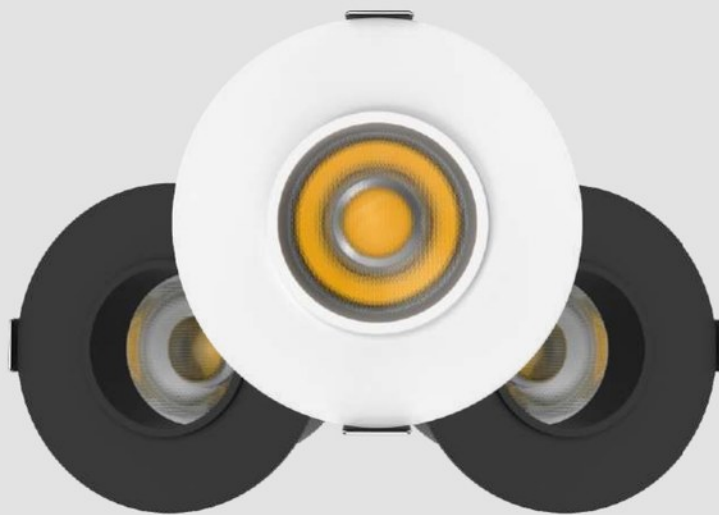

Dimming & Tuning Technology




RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

Watt	:	7-9w
Dimension	:	65X60mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



BOOST

MINIMAL SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

BK

WH

Body Color Available

Watt	:	5w	7-12w
Dimension	:	40X58mm	60X88mm
Cut Out	:	35mm	52mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

BRISK

MINIMAL SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w
Dimension	:	57X72mm	68X80mm
Cut Out	:	48mm	58mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	15/24/36/60°	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



STYLO

LOW DEPTH ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	85X50mm
Cut Out	:	75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	38°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

IRIS

360° ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	7-12w
Dimension	:	90X92mm
Cut Out	:	82mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/60°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

GEO

SPOT FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	130X45mm
Cut Out	:	130mm
Compatible	:	MR-16 Module
Material	:	Gypsum



FLY

SPOT FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	120X120X44mm
Cut Out	:	120X120mm
Compatible	:	MR-16 Module
Material	:	Gypsum


BINGE

WALLWASHER FRAME

Model	:	MR-16 Gypsum Frame
Dimension	:	120X120X65mm
Cut Out	:	120X120mm
Compatible	:	MR-16 Module
Material	:	Gypsum



WH Body Color Available

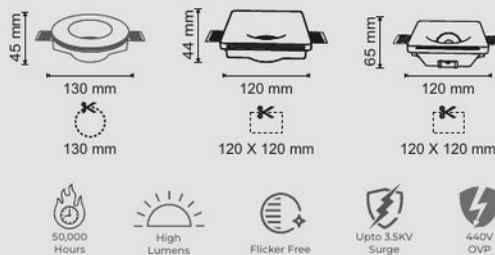

VISION

MR-16 MODULE



Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee

BK **WH** Body Color Available

Watt	:	12-15w
Dimension	:	50X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



GLOW

WALLWASHER



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	20w
Dimension	:	85X70mm	108X86mm
Cut Out	:	75mm	95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	Asymmetric Wallwasher	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge





440V
OVP



5
Year
Warranty*

FLASH

WALLWASHER

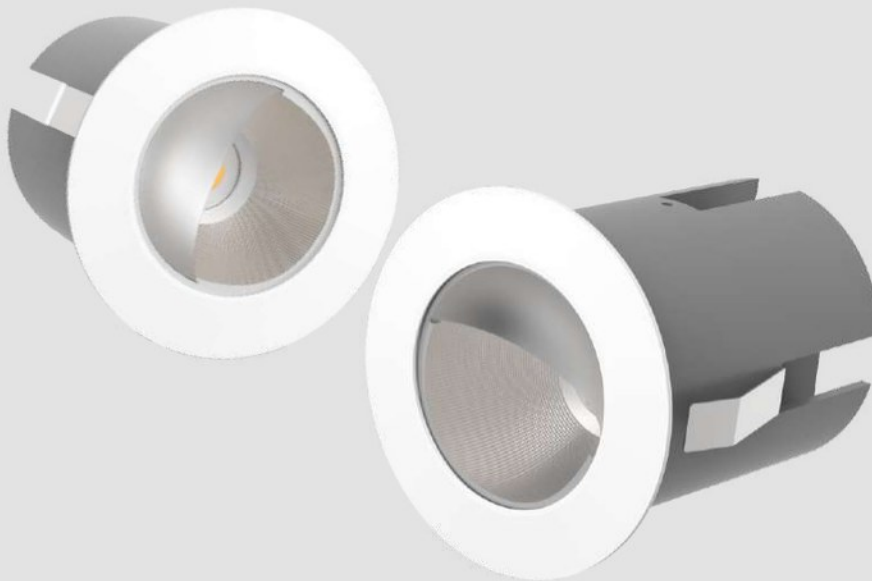

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

WH

Body Color Available

Watt	:	12w
Dimension	:	65X70mm
Cut Out	:	55mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
		Note : 2700/3500/5000k (available on request)
Beam Angle	:	Asymmetric Wallwasher
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge




440V
OVP



5
Year
Warranty*

DESIRE

SURFACE SPOTLIGHT

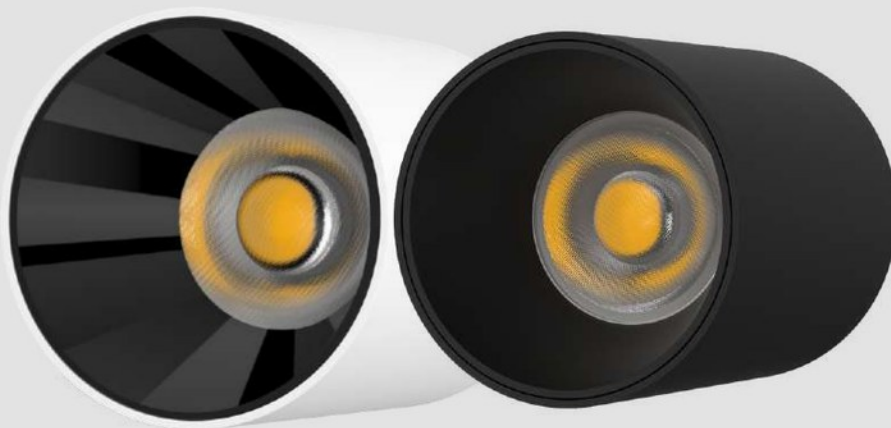

Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w	20w
Dimension	:	55X75mm	65X85mm	70X95mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	15/24/36/55°	15/24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

CORE

360° ADJUSTABLE SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT


Zigbee

BK

WH

Body Color Available

Watt	:	12w	12w
Dimension	:	55X70X95mm	55X70X95mm
Cut Out	:	52mm	-
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	24/36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Die Cast Aluminium ADC-12	
LED Brand	:	Bridgelux	



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

POLO

SPOTLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT



Zigbee

BK

WH

Body Color Available

Watt	:	7w	12w	20w	30w	36w
Dimension	:	85X32mm	115X42mm	145X50mm	170X60mm	230X70mm
Cut Out	:	75mm	100mm	130mm	155mm	200mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)				
		Note : 2700/3500/5000k (available on request)				
Beam Angle	:	45°				
CRI (Ra)	:	80 (90/95 available on request)				
Material	:	Die Cast Aluminium ADC-12				
LED Brand	:	Bridgelux				



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

OPAL

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK

Body Color Available

NEW
ARRIVAL

Watt	:	30w	36w	45w
Dimension	:	88X92mm	98X100mm	108X108mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	38°		
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Die Cast Aluminium ADC-12		
LED Brand	:	Bridgelux		



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

CHARGE

TRACKLIGHT



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT

Zigbee

BK


WH

Body Color Available

Watt	:	12w	20w	30w
Dimension	:	120X130X50mm	135X160X65mm	160X185X75mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)		
		Note : 2700/3500/5000k (available on request)		
Beam Angle	:	15/24/36/55°	24/36/55°	24/36/55°
CRI (Ra)	:	80 (90/95 available on request)		
Material	:	Aluminium		
LED Brand	:	Bridgelux		



Technical drawing of the LED strip showing dimensions: 120 mm length, 135 mm height, and 50 mm width.



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP

5

Year
Warranty*


FORCE

TRACKLIGHT

Watt	:	12w	20-30w
Dimension	:	145X60X140mm	145X80X160mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)	
		Note : 2700/3500/5000k (available on request)	
Beam Angle	:	36°	
CRI (Ra)	:	80 (90/95 available on request)	
Material	:	Aluminium	
LED Brand	:	Bridgelux	

Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT Zigbee



TRACK

2 Line/3 Line

TRACK CHANNEL

Dimension

1 Meter	:	1000X35X18mm
1.5 Meter	:	1500X35X18mm
2 Meter	:	2000X35X18mm



BK **WH** Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge






440V
OVP




5
Year
Warranty*

LOOP

LASERBLADE



Watt	:	4w	6w	8w
Dimension	:	52X32X40mm	62X32X40mm	52X52X40mm
Cut Out	:	46X26mm	56X26mm	46X46mm



Watt	:	10w	15w	20w
Dimension	:	108X32X40mm	71X71X40mm	204X32X40mm
Cut Out	:	102X26mm	65X65mm	198X26mm

CCT (K) : 3000k/4000k/6500k/2700-6500k(Tunable)


Note : 2700/3500/5000k (available on request)

Beam Angle : 25°

CRI (Ra) : 80 (90 available on request)

Material : Die Cast Aluminium ADC-12

LED Brand : Bridgelux

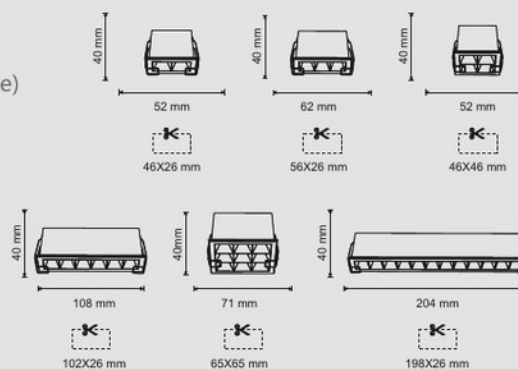

Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP





5
Year
Warranty*

STREAK

LASERBLADE




Watt : 4w
Dimension : 52X52X56mm
Cut Out : 42X42mm



12w
128X52X56mm
120X42mm




Watt : 16w
Dimension : 90X90X56mm
Cut Out : 80X80mm



20w
205X52X56mm
195X42mm

CCT (K) : 3000k/4000k/6500k/2700-6500k(Tunable)
Beam Angle : 38°
CRI (Ra) : 80 (90 available on request)
Material : Die Cast Aluminium ADC-12
LED Brand : Bridgelux

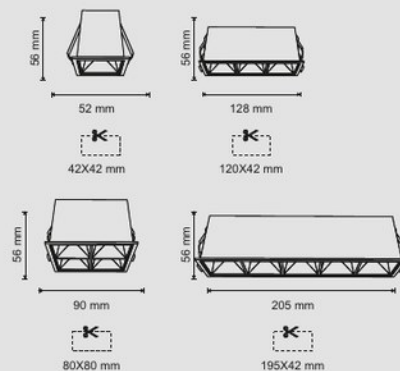

Dimming & Tuning Technology

RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

Body Color Available



COMPASS

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X44mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



BOAT

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X30mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux




PEARL

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	50X35mm
Cut Out	:	44mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



Dimming & Tuning Technology



RF 2.4G + BLE TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

CRUISE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X35mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux




DUKE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X30mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



BLAST

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X26mm
Cut Out	:	32mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	15/24°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



Dimming & Tuning Technology



RF 2.4G + BLE

TRIAC/PHASE CUT Zigbee

BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

ATOM

MINI SPOTLIGHT



Watt	:	5w
Dimension	:	50X45mm
Cut Out	:	43mm
CCT (K)	:	3000k/4000k/6500k/2700-6500k(Tunable)
Beam Angle	:	40°
CRI (Ra)	:	80 (90/95 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



SENSE

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	46X60mm
Cut Out	:	43mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	25°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux




ZEST

MINI SPOTLIGHT



Watt	:	3w
Dimension	:	40X32mm
Cut Out	:	33mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	30°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



Dimming & Tuning Technology

 RF 2.4G + BLE  TRIAC/PHASE CUT 

BK **WH** Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP




5
Year
Warranty*

HAMMER

MINI SPOTLIGHT


Watt	:	3w
Dimension	:	36X45mm
Cut Out	:	30mm
CCT (K)	:	3000k/4000k/2700-6500k(Tunable)
Beam Angle	:	25°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



STRIKE

MINI SPOTLIGHT

Watt	:	3w
Dimension	:	40X36mm
Cut Out	:	36mm
CCT (K)	:	3000k/4000k
Beam Angle	:	25°
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



Dimming & Tuning Technology

DALI 2 RF 2.4G + BLE TRIAC/PHASE CUT Zigbee




BK WH Body Color Available



BRIO

FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm
Beam Angle	:	120°

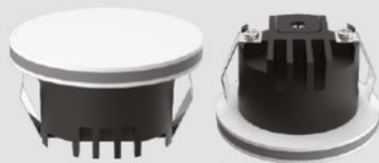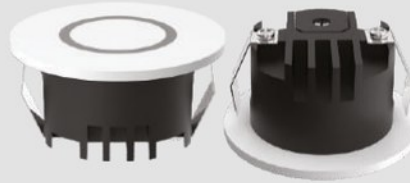

EDGE





FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm
Beam Angle	:	180°

GUSTO

FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm

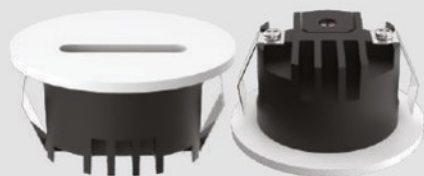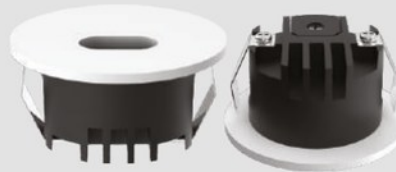

DASH

FOOTLIGHT

Watt	:	3w
Dimension	:	45X24mm
Cut Out	:	35mm

CCT(K)	:	3000k/4000k
CRI (Ra)	:	80 (90 available on request)
Material	:	Die Cast Aluminium ADC-12
LED Brand	:	Bridgelux



BK WH Body Color Available



50,000
Hours



High
Lumens



Flicker Free



Upto 3.5KV
Surge



440V
OVP



5
Year
Warranty*

BEAT

STRIP LIGHT



Voltage	:	12V			
Watt (Size)	:	6w/mtr. (8mm)	12w/mtr. (5mm)	12w/mtr. (8mm)	18w/mtr. (5mm)
LED/mtr.	:	2835 (60LED/mtr.)	2835 (120LED/mtr.)	2835 (120LED/mtr.)	2835 (180LED/mtr.)
		18w/mtr. (10mm)	24w/mtr. (10mm)		
		2835 (180LED/mtr.)	2835 (240LED/mtr.)		
Voltage	:	24V			
Watt (Size)	:	6w/mtr. (8mm)	12w/mtr. (5mm)	12w/mtr. (8mm)	18w/mtr. (5mm)
LED/Mtr.	:	2835 (60LED/mtr.)	2835 (120LED/mtr.)	2835 (120LED/mtr.)	2835 (180LED/mtr.)
		18w/mtr. (8mm)	24w/mtr.(10mm)		
		2835 (180LED/mtr.)	2835 (240LED/mtr.)		
CCT (K)	:	2700k/3000k/3500k/4000k/5000k/6500k			
Beam Angle	:	120°			
CRI (Ra)	:	80			
LED Brand	:	Bridgelux			
IP Rating	:	IP20			



Work with
SMPS

2

Year
Warranty*

BEAT

STRIP LIGHT (CCT)



Voltage	:	12V	
Watt (Size)	:	9w/mtr. (8mm)	12w/mtr. (10mm)
LED/Mtr.	:	2835 (180LED/mtr.)	2835 (240LED/mtr.)

Voltage	:	24V	
Watt (Size)	:	9.6w/mtr. (8mm)	12w/mtr. (10mm)
LED/Mtr.	:	2835 (192LED/mtr.)	2835 (240LED/mtr.)

CCT (K)	:	2700-6500k(Tunable)
Beam Angle	:	120°
CRI (Ra)	:	80
LED Brand	:	Bridgelux IP20
IP Rating	:	



Work with
SMPS

2
Year
Warranty*

WALLGRAZER

CURTAIN STRIPLIGHT

Voltage : 24V
Watt : 16w
LED : 48LED
CCT(K) : 3000k/4000k

Watt : 2X14.4w
LED : 56LED
CCT(K) : 3000k/4000k/2700-6500k(Tunable)
Beam Angle : 24°
Size : 12mm
IP : Ip20



WIDE BEAM STRIP

DIFFUSED STRETCH CEILING LIGHT

Voltage : 24V
Watt : 24w
LED : 24LED
CCT(K) : 2700-6500k(Tunable)
Beam Angle : 165°
Size : 15mm
IP : Ip20



2
Year
Warranty*

SKY LINE

Belt Width : 10mtr./Roll
Application Width : <10mm
IP : Ip20



SILICON FLEX



Type	:	Inbuilt Strip Silicon Flex	
Item	:	1010	1616
Watt	:	7.5w	12w
Voltage	:	24V	
CCT(K)	:	3000k	



Work with
SMPS

2
Year
Warranty*



WHERE LIGHT
BECOMES THE
MASTERPIECE

SIMPLIFIED INTELLIGENT LIGHTING



1104, Sakar IX, Besides Old RBI Building, Ashram Road, Ahmedabad - 380009, India.

Sales Inquiry : +91 98980 52888 | **Email :** sales@aconinnovations.com

URL : www.aconinnovations.com